


8" SKIMMER CUT SHEET


Ships in cardboard box on pallet | Dimensions: 49" x 49" x 33"
 Patent # 5,820,751

Faircloth Skimmer®

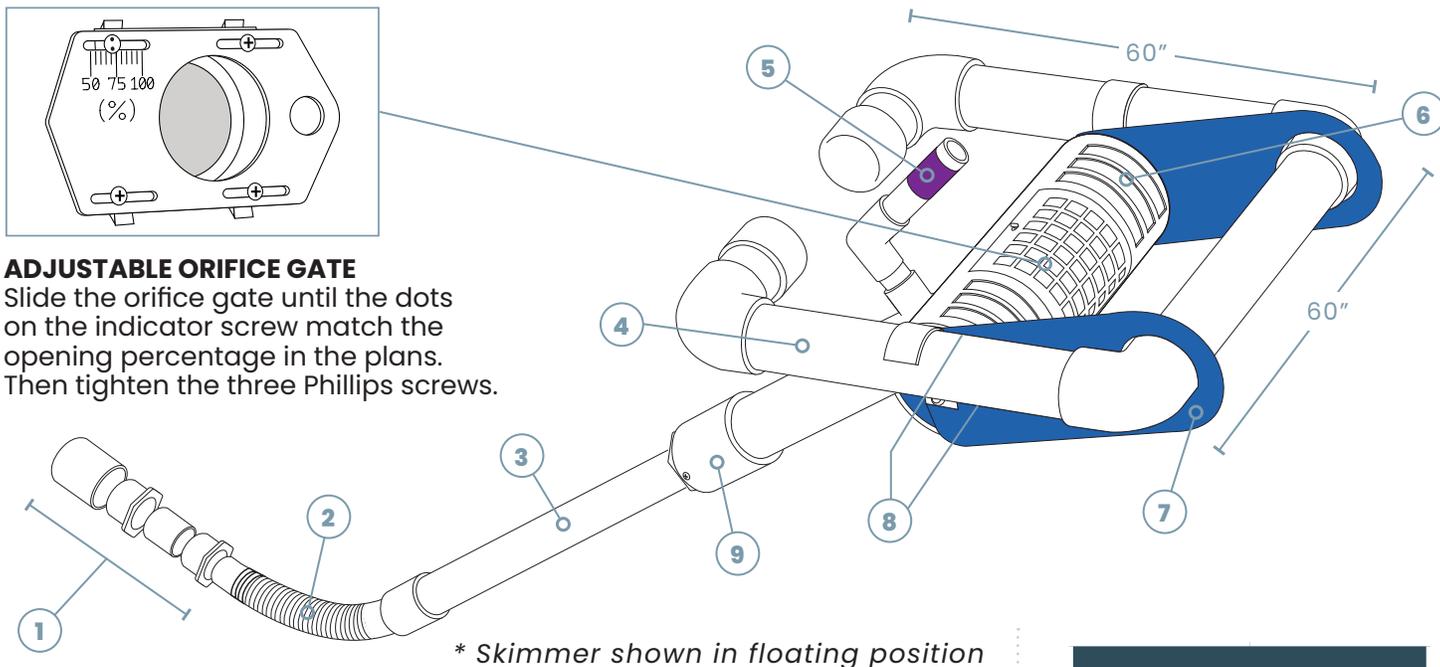

* Skimmer shown in floating position

1 8" Sch 40 coupling connection, 8" x 6" reducer bushing, 7" of 6" pipe, and 6" x 6" threaded female adapter to be attached to a 6" or 8" outlet structure. See below for assembly:

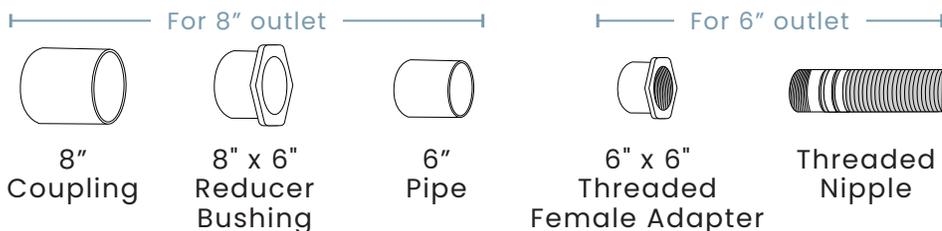

2 6" Flex hose with 6" female coupling to be connected to barrel pipe.

3 6" Sch 40 solid PVC barrel (SUPPLIED BY USER).

4 6" PVC float.

5 2" 90° Vent with PURPLE tip.

6 Inlet assembly with aluminum screen that houses 8" adjustable orifice gate.

7 1/8" inch HDPE blue skirts.

8 6" Head (distance from center of inlet to water surface).

9 8" Inlet extension.

SHIPS ASSEMBLED. USER INSTALLS COMPONENTS AND SETS ORIFICE GATE TO ENGINEER SPECIFIED OPENING PERCENTAGE.

Additional Parts Included

7" of 6" Pipe



Can be added to 8" coupling to assist in attaching to outlet structure.

100' Rope



Attach to skimmer so that it can be pulled to the side of the sediment basin for maintenance.

Non-Included Parts

6" Sch 40 SOLID PVC barrel or "arm" (See #3)

For technical data, sizing, cut sheets, or design assistance please contact us at:

(919) 732-1244 or visit fairclothskimmer.com